



## SESQH612\*\*\*618 Series Replacement Cartridges


High Efficiency - High Capacity

Epoxy coated wire supported pleated microglass construction

Size compatible with typical 6"OD x 18" Long flat gasket sealed cartridges

MEDIA	CARTRIDGE PART #
A01	SESQH612A01618BFG
A03	SESQH612A03618BFG
A06	SESQH612A06618BFG
A12	SESQH612A12618BFG
A25	SESQH612A25618BFG

### MEDIA EFFICIENCY ISO 16889

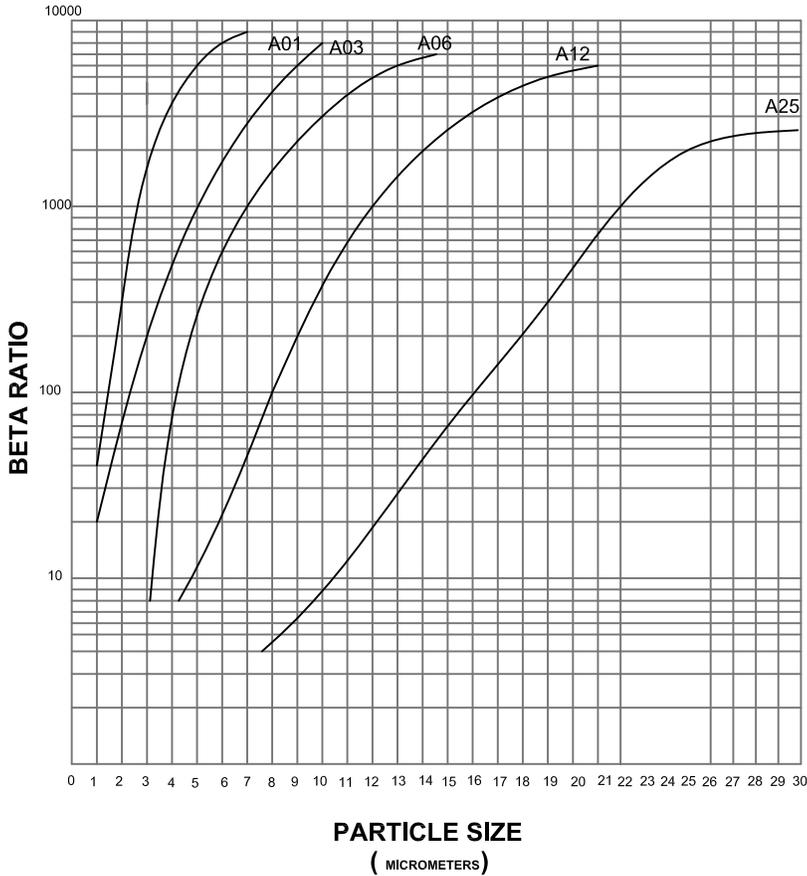

- Media Type: Microglass Epoxy Coated Wire Support
- Endcap & Center Tube: Corrosion Protected Steel
- Flow Direction: Outside In
- Gasket Material : Nitrile
- Collapse Pressure Rating : 125 PSID
- Temperature Range: Nitrile -45°F to 225°F
- Media Area: 3805 in<sup>2</sup>
- Replacement Pressure: 25 PSID
- Weight: 6 lbs

Micron	Apparent Dirt Capacity (g)
01	262
03	316
06	445
12	525
25	552

### Pressure Drop vs. Flow (150 SSU - .9 SG)

